



Canned motor pumps for high-pressure CO₂ systems

Decentralised, pump-less cooling systems are often installed in smaller supermarkets. For large supermarkets or distribution centres of supermarkets, central refrigeration systems are much more attractive due to their higher efficiency. Due to potential hazards to people and goods, CO₂/ammonia cascade, straight ammonia or CO₂ systems are often used. Canned motor pumps are mainly used in these systems because of the high level of risk. HERMETIC can offer the right pump for all common types of systems and pumping media.

Your benefits

- Protection: Absolute leak-tightness of the system even when using coolants with high requirements such as ammonia or CO₂
- Efficiency: Lowest life cycle costs thanks to low maintenance costs
- Safety: Emergency storage for standard portfolio in the case of a pump failure

Typical areas of application

- Supermarkets
- Distribution centres of supermarkets

APPLICATION REPORT

Supermarket – wholesale market in Northern Germany

Delivery rate:	4 m ³ /h
Pumping head:	30 m
Operating temperature:	-10 °C to +5 °C
Refrigerant:	CO ₂
System type:	High-pressure CO ₂ system


Requirements

As part of an extensive renovation, a supermarket / wholesale market in Northern Germany decided to use CO₂ as a refrigerant. The operating temperature of the liquid carbon dioxide should be between -10 °C and + 5 °C and withstand a maximum operating pressure of 52 bar. The operating point of the pump was calculated at a pumping head of 24 m with a pump capacity of 4 m³/h. Important factors in the design of the refrigeration system and components were the high safety requirements, the prevention of excess pressure in the system and leak-free operation.

The pump used

Thanks to the high-pressure resistance, a HERMETIC canned motor pump CAMh 2/4 with AGX4.5 motor was installed in the system. The pressure resistance is achieved through the robust construction and the ceramic bearings made of silicon carbide that can withstand an operating pressure of 52 bar and a test pressure of 78 bar. For efficient operation of the pump at the operating point, the impeller diameter was adjusted to 114 mm. A Q_{max} and a Q_{min} orifice were installed as a protection against cavitation. This ensured a smooth, long-lasting operation of the pump. For the system manufacturer, the comprehensive knowledge of HERMETIC in the use of CO₂ as a refrigerant and the quick availability of replacement pumps in the case of problems were decisive for the choice of this HERMETIC pump.

Further information on HERMETIC CAM 30 is available [here](#).

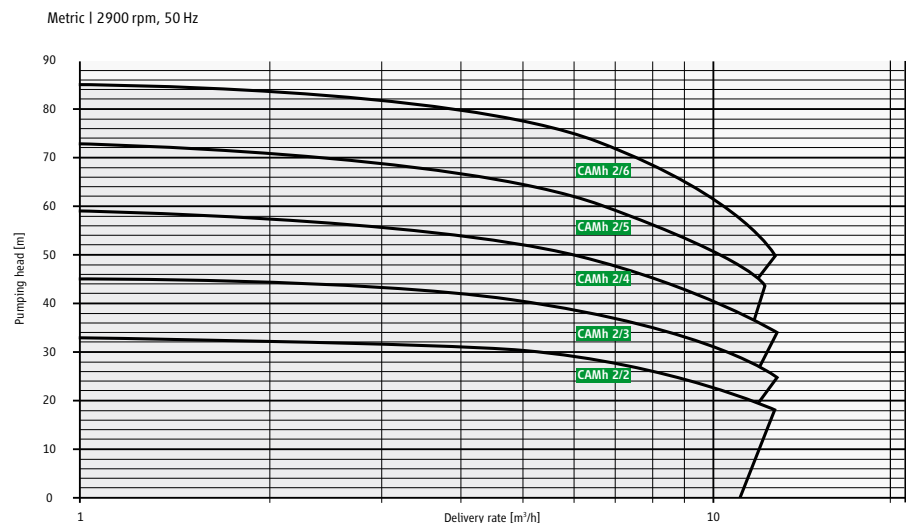

Medium / refrigerant

Carbon dioxide is increasingly used as a refrigerant. Particularly popular are supermarket refrigeration and industrial refrigeration systems. CO₂ is used in different forms – subcritical in cascade systems, transcritical in pure CO₂ systems or as a secondary fluid. The advantages of carbon dioxide are the particularly good heat transfer coefficient, exceptionally low viscosity and high environmental compatibility.

Everything you need to know about CO₂ is available [here](#).

We have the right pumps for your industry



CAMh



CNF



CAM(R)

Delivery rate:	max. 14 m ³ /h	max. 80 m ³ /h	max. 40 m ³ /h
Pumping head:	max. 120 m	max. 70 m	max. 180 m
Pressure rating:	PN52	PN25 and PN40	PN25 and PN40
Operating temperature:	-50 °C to +5 °C	-50 °C to +30 °C	-50 °C to +30 °C
Speed:	2800 to 3500 rpm	2800 to 3500 rpm	2800 to 3500 rpm
Viscosity:	max. 20 mm ² /s	max. 20 mm ² /s	max. 20 mm ² /s

[Learn more](#)

[Learn more](#)

[Learn more](#)

Customisations

If you cannot find a suitable pump series? We are happy to help you with a customised solution regardless of the quantity. Please contact us.

[Contact now](#)



HERMETIC-Pumpen GmbH
79194 Gundelfingen, Germany
www.hermetic-pumpen.com
cool-support@hermetic-pumpen.com